


NST Spritzschutzband

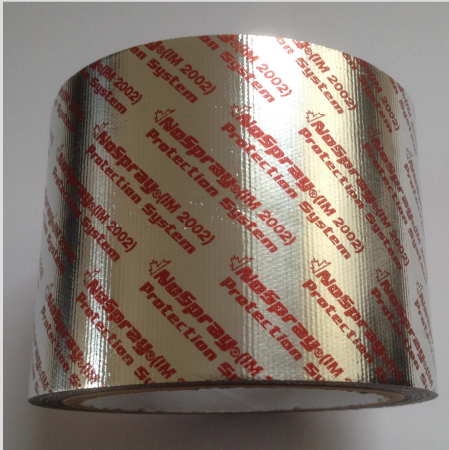



Erfüllt SOLAS Regulation II – 2/15.2.11 zum Einsatz als Spritzschutz auf Schiffen.

Produktauswahl

Artikelnummer	Breite	Länge p. Rolle	Rollen p. Box	Preis p. Rolle in EUR
NST035	35 mm	10 m	28	
NST050	50 mm	10 m	20	
NST075	75 mm	10 m	16	
NST100	100 mm	10 m	12	
NST140	140 mm	10 m	7	
NST250	250 mm	10 m	4	
NST500	500 mm	10 m	2	
NST999	1000 mm	10 m	1	

NST Spritzschutzband

Assembly Cutaways

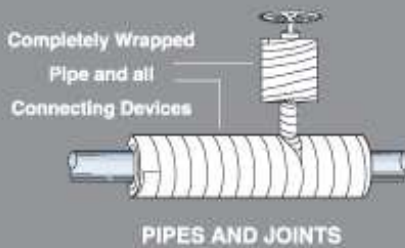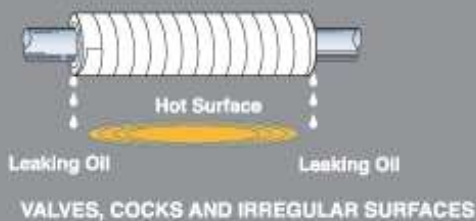

Flanges



Specifications/Spezifikationen

Total Thickness	9,5 Mils
Gesamtstärke	0,25 mm
Colour	Silver
Farbe	Silber
Temp. Range	Up to 300°F
Maximaltemperatur	bis zu 150°C
Pressure	300 psi
Druck	20 bar
Tensile Strength	93.2 lbs. per inch
Reißfestigkeit	163 kp/cm
Adhesion to Steel	5.8 lbs. per inch
Klebekraft Stahl	10,2 kp/cm
Aging Properties	Indef. shelf life propstored
Lagerfähigkeit	unbegrenzt bei
	Raumbedingungen
Ideal Storage Cond.	70°F at 50% relative
Optimale Lagerbedingungen	humidity
	20 °C 50% Rel. Luftfeuchte

Applications/Anwendungen

- Fuel oil injection pipes, fuel oil service pipes, fuel oil valve cooling oil pipes attached to diesel engines
- Lube oil service pipes and hydraulic oil pipes attached to diesel engines
- Flammable oil pipes
- Flammable oil pump and strainer
- Fuel oil heater